



REV	CONTENT	CHK	DATE
V0.0	CONTENT	LZW	23.08.26
V0.1	依实物修正图面Logo位置	ZCL	26.09.22

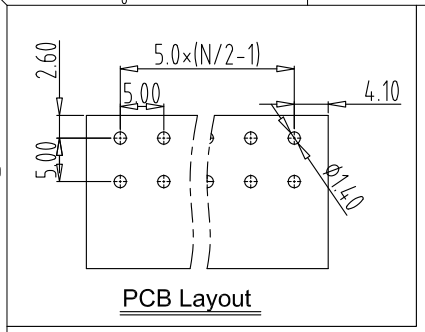

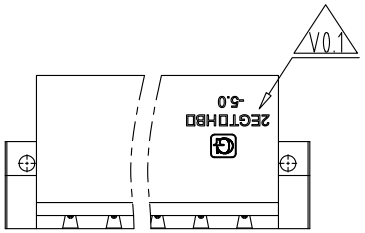

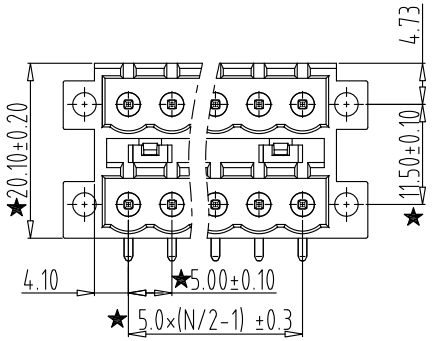

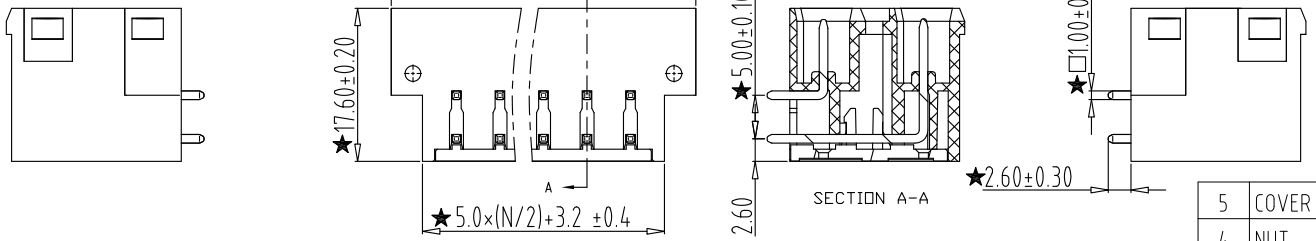

Electrical :

	UL	IEC
1.Rated Voltage :	300V	320V
2.Rated Current :	12A	12A

3.Withstanding Voltage : AC1600V/1Min.
4.Operating Temperature : -40°C~+105°C
5.RoHS Compliance
6."★" is the key quality control point.

2EGTRHBM - 5.0 - XXP - X X - 00
① ② ③ ④ ⑤ ⑥

① Sereies NO.

② Pitch

③ Poles
02 02Contacts
03 03Contacts
...
24 24Contacts

④ 1 Single Pitch
2 Double Pitch

⑤ Color: 1 Grey, 2 Blue, 3 Black, 4 Green, 5 Orange, 6 Red, 7 Transparent, 8 Yellow, 9 White

⑥ Customer Request: 00--Standard

Total Pitch Tolerances in mm									Nominal dimension range in mm									⊥		≒	—	//	
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 250	over 250 to 350	over 350 to 500	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10	all	over 0 to 100	over 100 to 150	over 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5

5	COVER	XXXXXX	1	PA66	UL94V-0	
4	NUT	XXXXXX	4	COPPER ALLOY	/	
3	LONG PIN	XXXXXX	P/2	COPPER ALLOY	Tin Plated	
2	SHORT PIN	XXXXXX	P/2	COPPER ALLOY	Tin Plated	
1	HOUSING	XXXXXX	1	PA66	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE	
DWG.	LZW DATE	23.08.26	SIZE	A4 UNITS mm	SHEET/OF 1 / 1	
CHK.	DATE		SCALE	1:1		
APP.	DATE		NAME	2EGTRHBM-5.0-XXP-XX-00		
Golten 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.			DWGNO.	XXXX		