

REV	CONTENT	CHK	DATE
V0.0	CONTENT	NJL	25.10.13

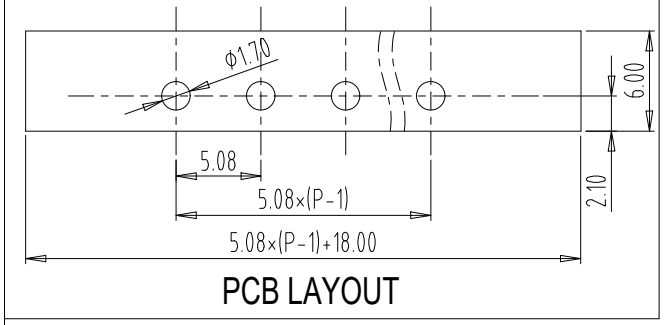

PCB LAYOUT

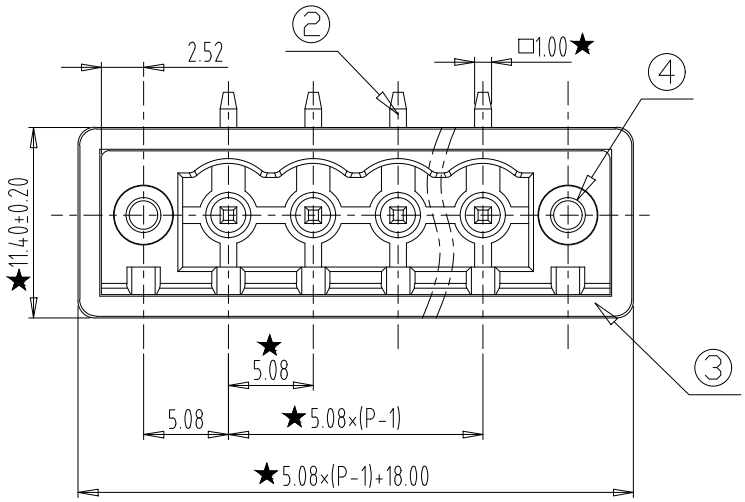

Electrical :

	UL	IEC
1.Rated Voltage :	300V	320V
2.Rated Current :	15A	20A

3.Withstanding Voltage : AC2200V/1Min.

4.Operating Temperature : -40°C~+105°C

5.RoHS Compliance

6."★ " is the key quality control point.

2CGTRM - 5.08 - 03P - X X - 00

① ② ③ ④ ⑤ ⑥

① Series No.


② Pitch


③ Poles
- 02 02Contacts
- 03 03Contacts
- ...
- 24 12Contacts

④ 1 Single Pitch
2 Double Pitch

⑤ Color:
1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White

⑥ Customer Request : 00--Standard

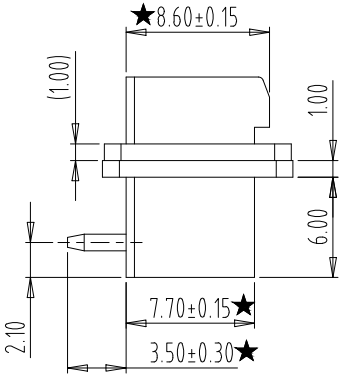

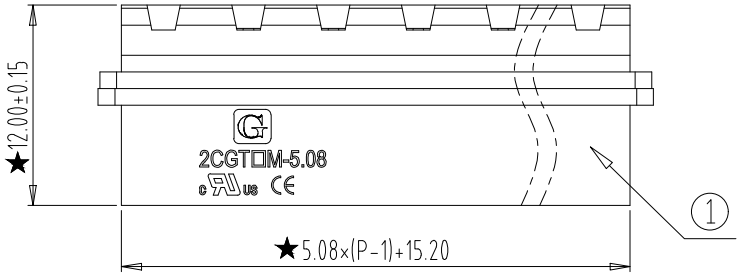

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥		⏥	—		//
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 250	over 250 to 350	over 350 to 500	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10	all	over 0 to 100	over 100 to 150	over 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
4	Dust mat	XX	1	EVA	/
3	NUT	XX	2	BRASS	M2.5
2	PIN	XX	P	Copper Alloy	Tin Plated
1	HOUSING	XX	1	PA66	UL94V-0

DWG.	NJL	DATE	25.10.13	SIZE	A4	UNITS	mm	SHEET/OF 1 / 1
CHK.		DATE		SCALE	1:1			
APP.		DATE		NAME	2CGTRM-5.08-XXP-XX-00			
Golten 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.				DWGNO.	XXXX			