

REV	CONTENT	CHK	DATE
V0.0	CONTENT	CXL	21.01.12

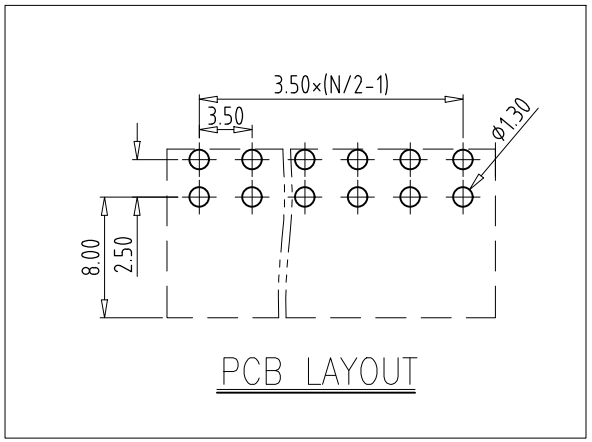

Electrical :

	UL	IEC
1.Rated Voltage :	150V	160V
2.Rated Current :	8A	8A

3.Withstanding Voltage : AC1300V/1Min.
4.Operating Temperature : -40°C~+130°C
5.RoHS Compliance
6.Safty Approval : cULus CE
7."★" is the key quality control point

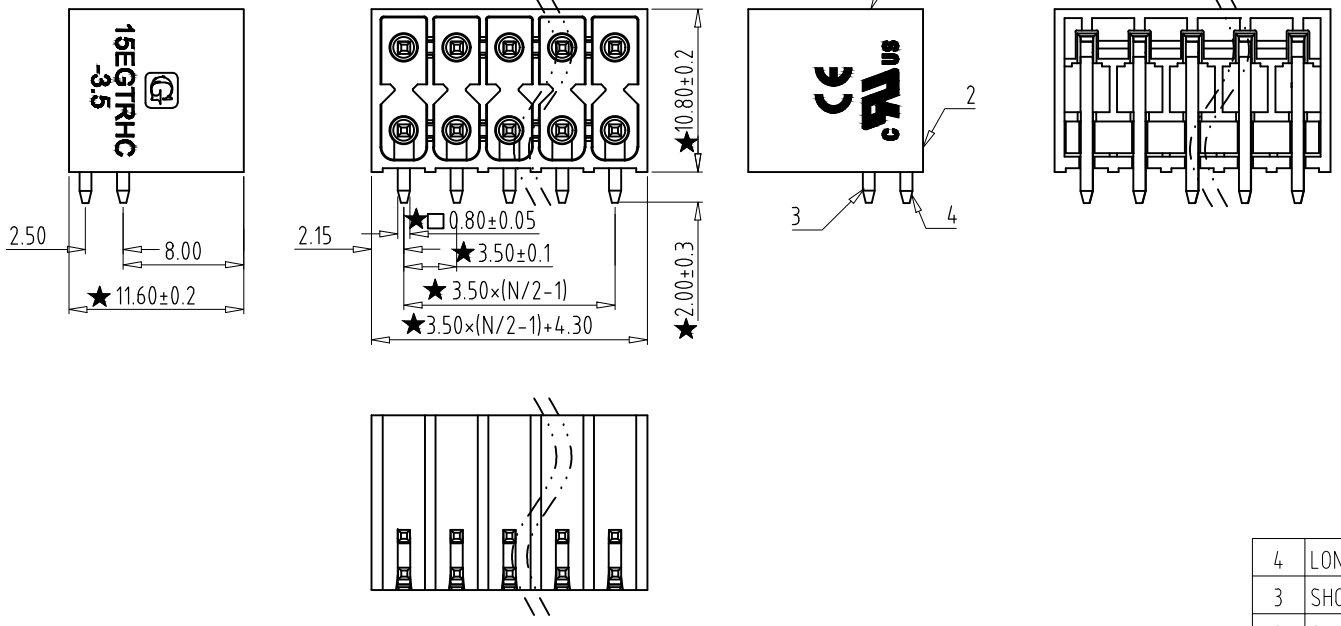

15EGTRHC -THR - 3.5 -XXP - X X - 00
① ② ③ ④ ⑤ ⑥ ⑦

① Sereies NO.

② High temperature

③ Pitch

④ Poles
02 02Contacts
03 03Contacts
...
24 24Contacts

⑤ 1 Single Pitch
2 Double Pitch

⑥ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White

⑦ Customer Request: 00--Standard

Total Pitch Tolerances in mm									Nominal dimension range in mm									⊥		⏥	—		//
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 250	over 250 to 350	over 350 to 500	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10	all	over 0 to 100	over 100 to 150	over 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5

4	LONG-PIN	XX	P/2	Copper alloy	Tin Plated
3	SHORT-PIN	XX	P/2	Copper alloy	Tin Plated
2	PATCH	XX	1	High temperature material	SEE NOTE
1	HOUSING	XX	1	High temperature material	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	CXL DATE	21.01.12	SIZE	A4 UNITS mm	SHEET/OF 1 / 1
CHK.	DATE		SCALE	1:1	
APP.	DATE		NAME	15EGTRHC-THR-3.5-XXP-XX-00	
Golten 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.			DWGNO.	XXXX	