

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

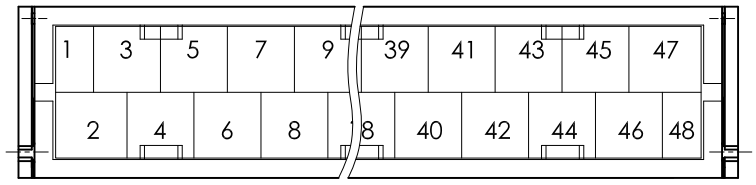



B DIRECTION

(W/O COVER)

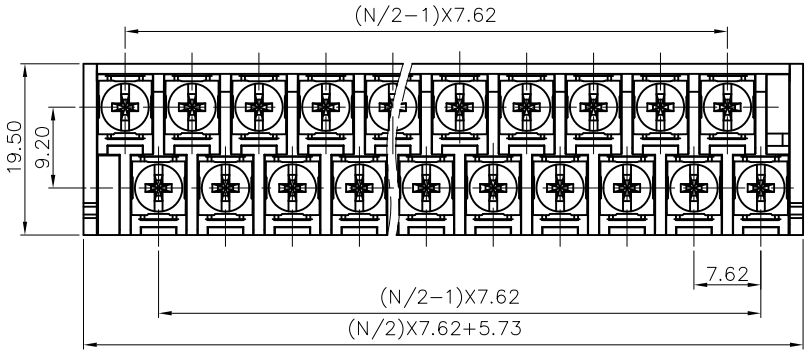

B DIRECTION

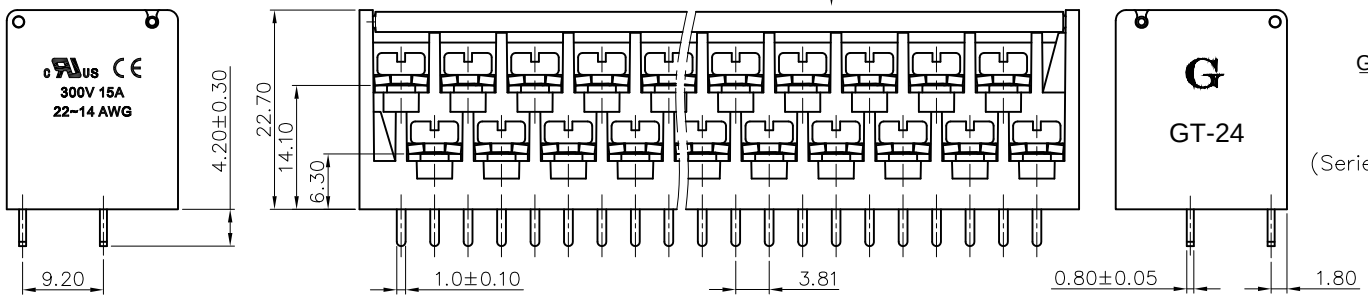

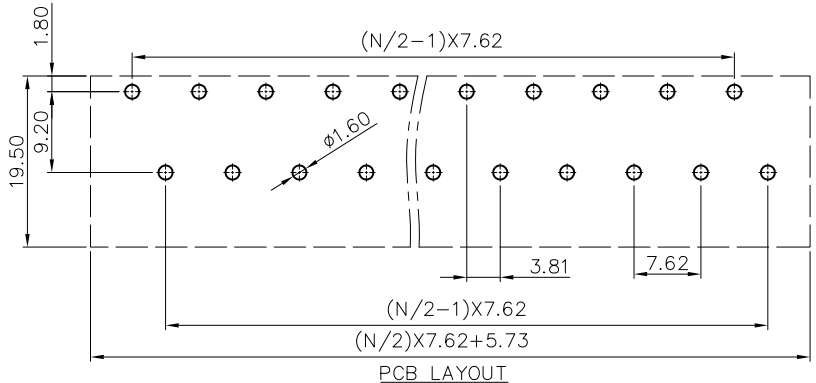

PCB LAYOUT

NOTES1:
UL Standard
1.Rated Voltage/Current : 300V / 15A
2.Torque Value : M3.0 , 4.43Lb.in
3.Wire Range : 14~22AWG

NOTES2:
1.Dimension shall be interpreted per ASME Y14.5-2009
2.Pitch : 7.62mm, Poles : N=6,8,10,12,14, 16,18,20,22,24,26,28,30,32,36,40,44,48P
3.Withstanding Voltage : AC1600V/1Min.
4.Operating temperature: -40°C~+105°C
5.Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					— ⌒ ▱
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10
								∠
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

6.RoHS Compliance

GT24-1-B - XXP - 1Y - 00A (H)
(RoHS)
00A-(Standard)
(Series No.) (Poles) (Single Pitch) (Color):1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

DETACHED LISTS	PART NO.: /	Golten 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.	
	APPD: /	NAME: GT24-1-B-XXP-1Y-00A(H)	
	CHKD: /		
	DRFT: /	TITLE: CUSTOMER DRAWING	REV D0
	THIRD ANGLE PROJECTION	DRAWING NO.: /	SHEET 1/1
		MM (INCH) DO NOT SCALE DRAWING	SCALE 1:1