

REV	CONTENT	CHK	DATE
V0.0	CONTENT	CXL	20.07.10

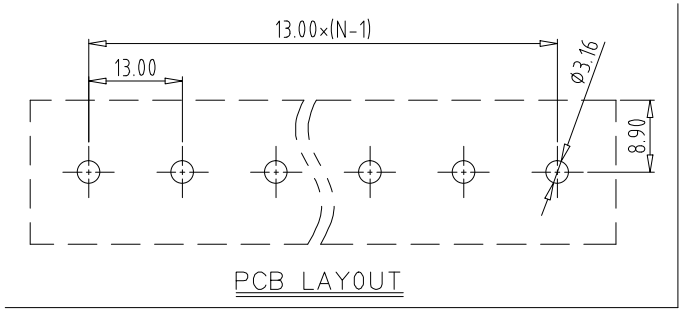

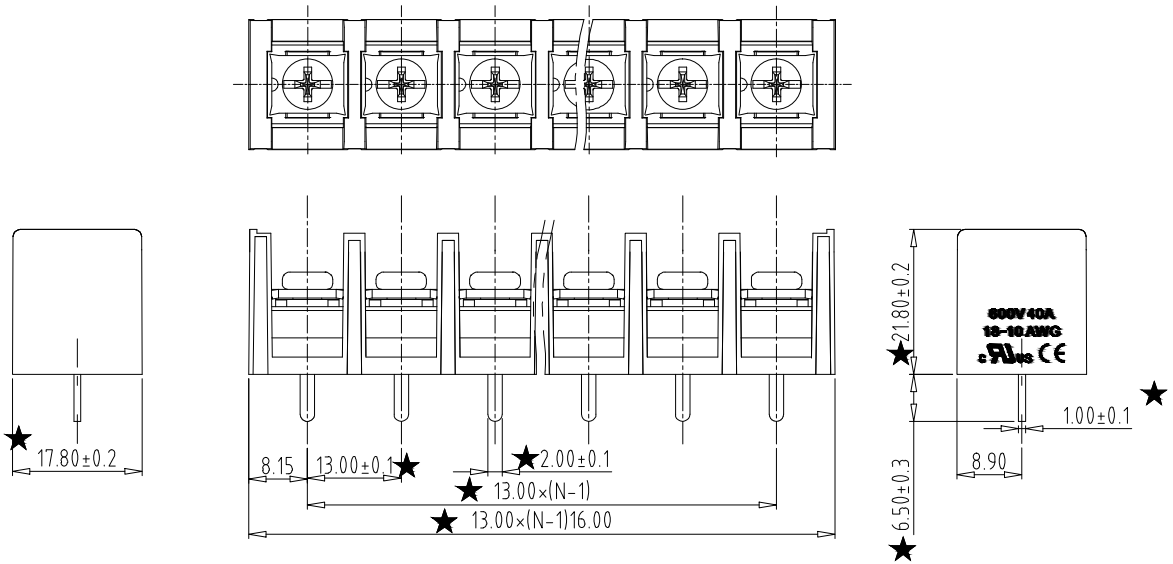

Electrical :

1.Rated Voltage : 600V
2.Rated Current : 50A
3.Torque Value : M4,10.53Lb.in
4.Wire Range:18-8AWG
5.Stripping Length :10-11mm
6.Withstanding Voltage : AC2500V/1Min.
7.Operating Temperature : -40 °C~+105°C
8.RoHS Compliance
9.Safty Approval :
10."★" is the key quality control point

GT75C - B -XXP - X X - 00
① ② ③ ④ ⑤ ⑥

① Sereies NO.

② With fixing hole

③ Poles
02 02Contacts
03 03Contacts
...
24 24Contacts

④ 1 Single Pitch
2 Double Pitch

⑤ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White

⑥ Customer Request: 00--Standard

Total Pitch Tolerances in mm									Nominal dimension range in mm									⊥		÷	— //		
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 250	over 250 to 350	over 350 to 500	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10	all	over 0 to 100	over 100 to 150	over 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5

3	Screws	XXXXXX		P	Steel		Ni Plated	
2	Contacts	XXXXXX		P	Brass		Tin Plated	
1	Housing	XXXXXX		1	PA66		UL94V-0	
ITEM	NAME OF PART	NO. OF PART		Q"TY	MATERIAL		NOTE	
DWG.	CXL	DATE	20.07.10	SIZE	A4	UNITS mm	SHEET/OF	1 / 1
CHK.		DATE		SCALE	1:1			
APP.		DATE		NAME	GT75C-B-XXP-XX-00			
Golten 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.				DWGNO.	200710.C01			