



REV	CONTENT	CHK	DATE
V0.0	CONTENT	CXL	20.05.11

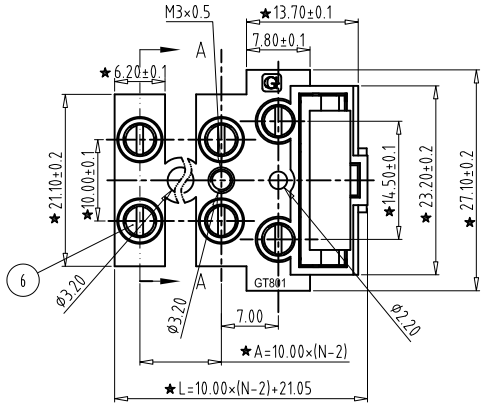

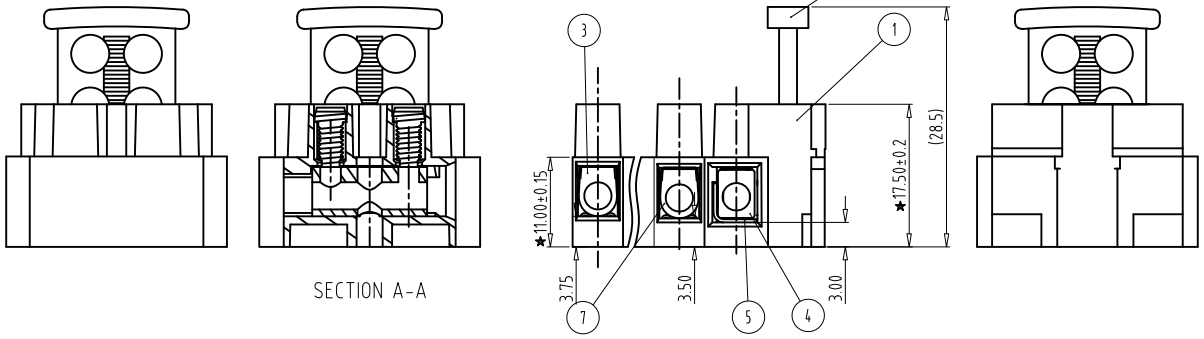

SECTION A-A





Electrical :

	UL	IEC
1.Rated Voltage :	300V	250V
2.Rated Current :	6.3A	6.3A
3.Torque Value :	M3,4.43Lb.in	M3, 0.5N.m
4.Wire Range:	22-14AWG	0.5-2.5mm^2

5.Stripping Length : 6-7mm
6.Withstanding Voltage : AC2000V/1Min.
7.Operating Temperature : -40°C~+105°C
8.RoHS Compliance
9.Safty Approval : c UL us CE
10."★" is the key quality control point

GT1450B-801 - XXP - X X - 00
① ② ③ ④ ⑤

① Sereies NO.
③ 1 Single Pitch
2 Double Pitch

② Poles
02 02Contacts
03 03Contacts
...
05 05Contacts

④ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White

⑤ Customer Request: 00--Zinc Alloy Cage

Total Pitch Tolerances in mm									Nominal dimension range in mm									⊥		≑	—		//
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 250	over 250 to 350	over 350 to 500	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10	all	over 0 to 100	over 100 to 150	over 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
7	Brass Cage-02	XX	1	Brass	Ni Plated
6	SCREW	XX	2P	Steel	Zn Plated
5	Clamp	XX	2	Phosphor Bronze	Ni Plated
4	Brass Cage	XX	2	Brass	Ni Plated
3	Current carrier	XX	P-2	Zinc Alloy	Ni Plated
2	HAND	XX	1	PA66 UL94V-0	SEE NOTE
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE

DWG.	CXL	DATE	20.05.11	SIZE	A4	UNITS	mm	SHEET/OF	1 / 1
CHK.		DATE		SCALE	1:1				
APP.		DATE		NAME	GT1450B-801-XXP-XX-00				

Golten 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.
DWGNO. XXXX