


REV	CONTENT	CHK	DATE
V0.0	CONTENT	SYJ	25.01.18

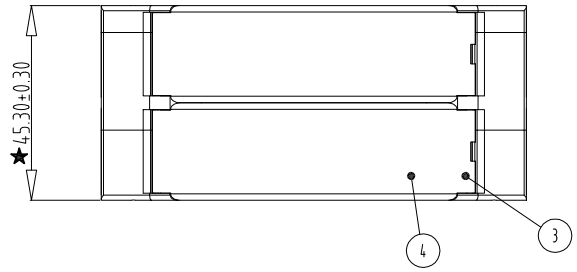

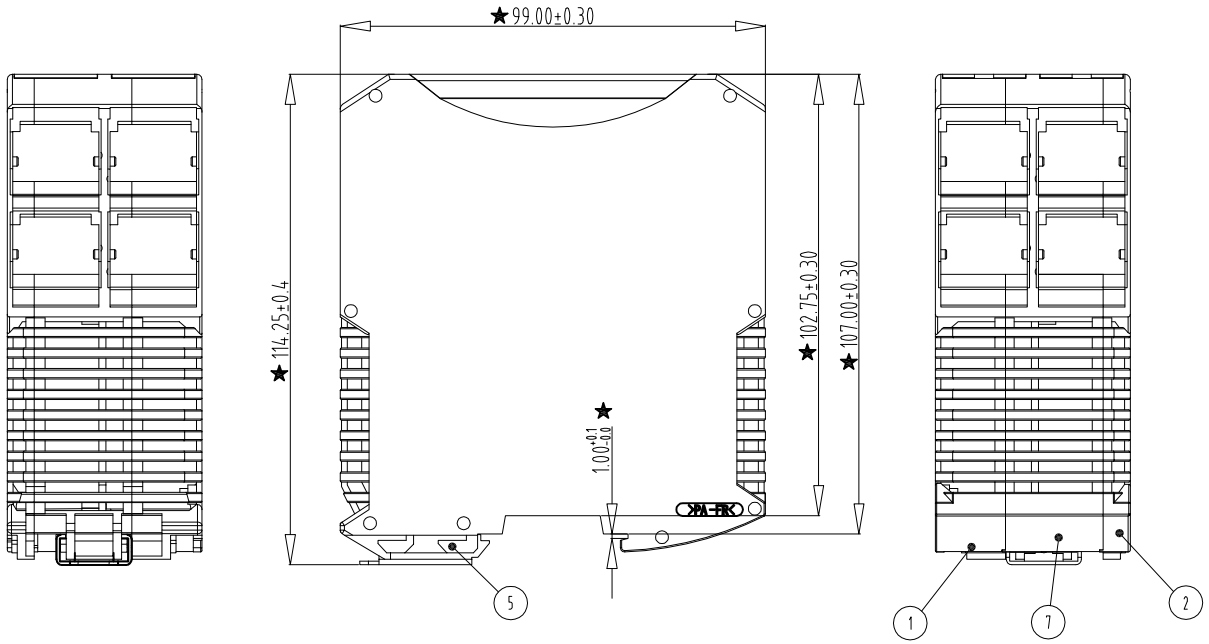

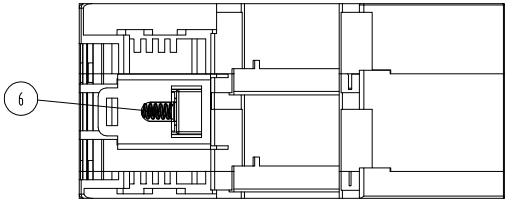

NOTES:

1. Material: PA66 UL94V-0;
2. The surface shall not have material flowers, shrinkage, deformation, lack of material, distortion, color and other adverse phenomena;
3. Ambient temperature: -40~ +105℃
4. "★" is the key quality control point.

GTKT02 - 45.0 - X X - 00

① ② ③ ④ ⑤

① Sereies NO.

② Pitch

③ 1 Single Pitch

④ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White

⑤ Customer Request: 00--standard

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
7	HOUSING-MIDDLE	XXXXXX	1	PA66 UL94V-0	SEE NOTE
6	SPRING	XXXXXX	1	Stainless steel	SEE NOTE
5	FOOT CATCH	XXXXXX	1	STEEL	Zn Plated
4	HINGED COVER	XXXXXX	1	PC UL94V-2	SEE NOTE
3	FRONT PLATE	XXXXXX	2	PA66 UL94V-0	SEE NOTE
2	HOUSING-RIGTT	XXXXXX	1	PA66 UL94V-0	SEE NOTE
1	HOUSING-LEFT	XXXXXX	1	PA66 UL94V-0	SEE NOTE

DWG.	SYJ	DATE	25.01.18	SIZE	A4	UNITS	mm	SHEET/OF	1 / 1
CHK.		DATE		SCALE	1:1				
APP.		DATE		NAME	GTKT02-45.0-XX-00				

Golten 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD. DWGNO. XXXX

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥		⫩	—		//	
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 250	over 250 to 350	over 350 to 500	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10	all	over 0 to 100	over 100 to 150	over 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5