



REV	CONTENT	CHK	DATE
V0.0	CONTENT	CXL	20.05.11
V0.1	CONTENT	CXL	20.11.09

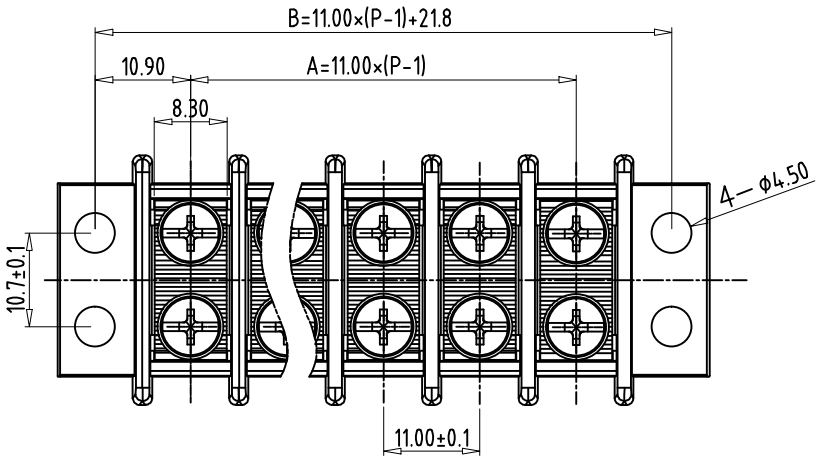

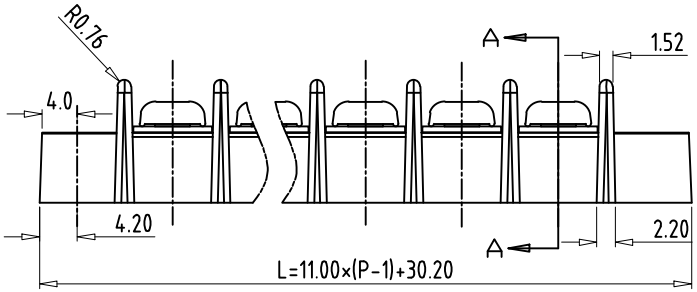

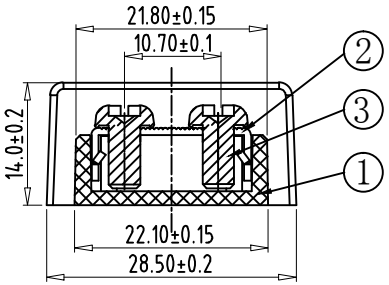

SECTION A-A



Electrical :

	UL	IEC
1.Rated Voltage :	300V	750V
2.Rated Current :	25A	32A
3.Torque Value :	M3.5 ,7.02Lb.in	M3.5, 0.8N.m
4.Wire Range:	22-10AWG	4mm²

5.Stripping Length : 9-10mm
6.Withstanding Voltage : AC2000V/1Min.
7.Operating Temperature : -40°C~+80°C
8.RoHS Compliance
9.Safty Approval :
10."★" is the key quality control point

GT69-A -XXP - X X - 00
① ② ③ ④ ⑤

①Sereies NO.
③ 1 Single Pitch
2 Double Pitch

④ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White

②Poles
02 02Contacts
03 03Contacts
...
24 24Contacts

⑤ Customer Request: 00--Standard

Total Pitch Tolerances in mm									Nominal dimension range in mm									⊥		÷	—		//
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 250	over 250 to 350	over 350 to 500	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10	all	over 0 to 100	over 100 to 150	over 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5

3	SCREW	XX	2P	Steel	Ni-Plated		
2	PIN HEADER	XX	P	Brass	Tin-Plated		
1	HOUSING	XX	1	PC	UL94V-2		
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE		
DWG.	CXL	DATE 20.05.11	SIZE	A4	UNITS mm	SHEET/OF 1/1	
CHK.		DATE	SCALE	1:1			
APP.		DATE	NAME	GT69-A-XXP-XX-00			
Golten 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.			DWGNO.	XXXX			