



FOR-1351 Rev.1.0


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

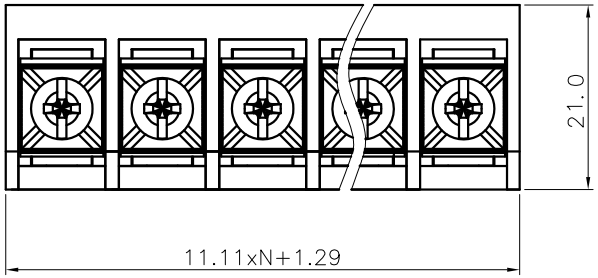



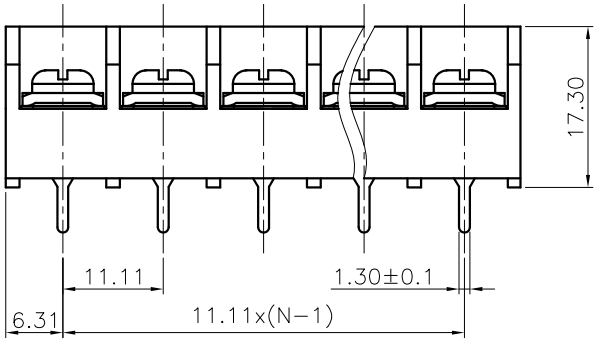



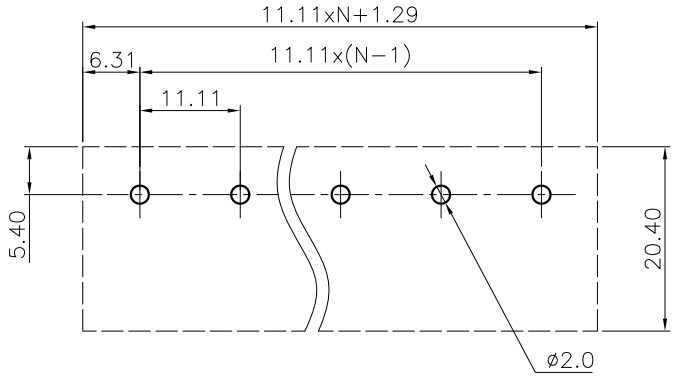

PCB LAYOUT

NOTES1:
UL Standard
1.Rated voltage/current : 300V / 30A
2.Torque value : M4 , 10.53Lb.in
3.Wire range : 22~10AWG

NOTES2:
1.Dimension shall be interpreted per ASME Y14.5-2009
2.Pitch : 11.11mm, Poles : N=02~26P
3.Withstanding voltage : AC1600V/1Min
4.Operating temperature: -40°C~+105°C
5.Undimensioned tolerances:

Pitch Range In mm			Nominal Dimension Range In mm					– ⌒ ⌓
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10 ∠
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

6.RoHS Compliance

GT66S-B - XXP - XX - 00A (H)
(RoHS)
00A-(Standard)
(Series No.) (Poles) (Single Pitch) (Color):1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

DETACHED LISTS

PART NO.: Nick /09/01/17'	Golten 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.		
APPD: /	NAME: GT66S-B-XXP-XX-00AH		
CHKD: /	TITLE: CUSTOMER DRAWING	REV	D0
DRFT: /	DRAWING NO.: /	SHEET	1/1
THIRD ANGLE PROJECTION	MM (INCH) DO NOT SCALE DRAWING	SCALE	1:1