
REV	CONTENT	CHK	DATE
V0.0	CONTENT	CXL	21.01.12
V0.1	修正技术参数	LZW	23.04.13
V0.2	调整线数说明	ZCL	26.03.05

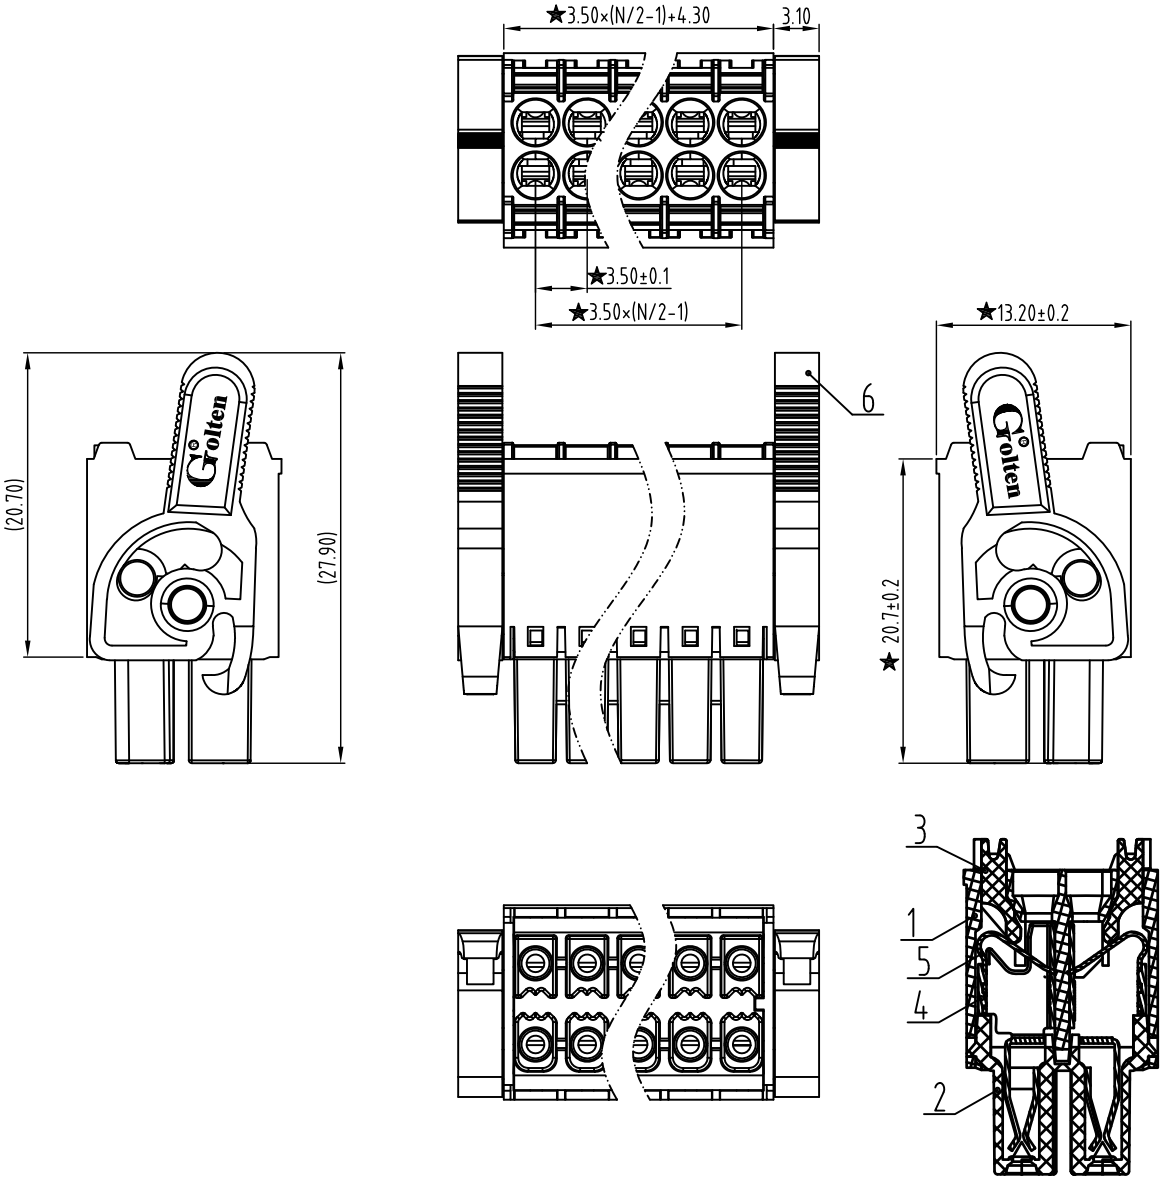

Electrical :

	UL	IEC
1.Rated Voltage :	150V	160V
2.Rated Current :	8A	8A
3.Wire Range:	24-16AWG	0.2-1.5mm^2

4.Stripping Length : 8-10mm
5.Withstanding Voltage : AC1600V/1Min.
6.Operating Temperature : -40°C~+105°C
7.RoHS Compliance
8.Safty Approval : c UL us CE
9."★" is the key quality control point

15EGTKNHG - 3.5 -XXP - X X - 00
① ② ③ ④ ⑤ ⑥

① Sereies NO.

② Pitch

③ Poles
04 04Contacts
06 06Contacts
...
40 40Contacts
V0.2

④ 1 Single Pitch
2 Double Pitch

⑤ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White

⑥ Customer Request: 00--Standard

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
6	CARD HOOK	XX	2	POM	SEE NOTE
5	SPRING	XX	P	STAINLESS STEEL	/
4	CLAMP	XX	P	COPPER ALLOY	Tin Plated
3	BUTTON	XX	P	POM UL94-HB	SEE NOTE
2	COVER	XX	1	PA66 UL94V-0	SEE NOTE
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE

DWG.	LZW	DATE	23.04.13	SIZE	A4	UNITS mm	SHEET/OF 1 / 1
CHK.		DATE		SCALE	1:1		
APP.		DATE		NAME	15EGTKNHG-3.5-XXP-XX-00		

Golten 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD. DWGNO. XXXX

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥		⫩	—		//	
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 250	over 250 to 350	over 350 to 500	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10	all	over 0 to 100	over 100 to 150	over 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5