
REV	CONTENT	CHK	DATE
V0.0	CONTENT	MYZ	21.06.25

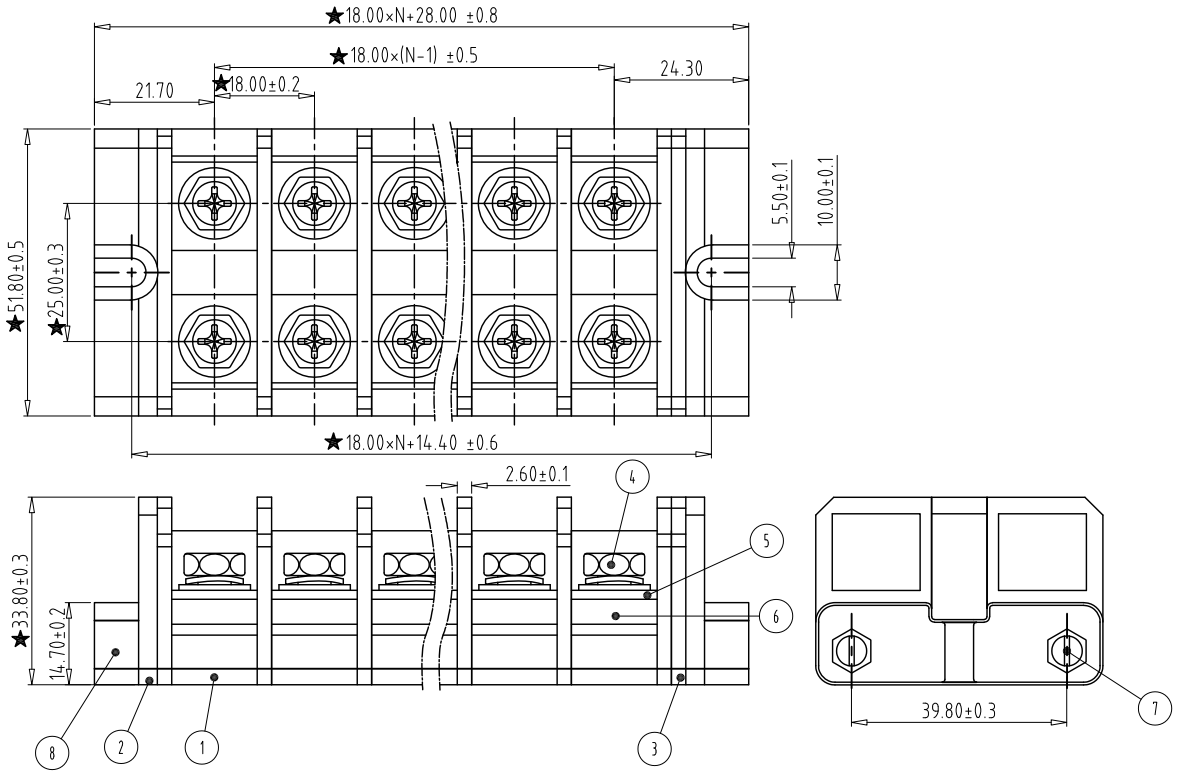

Electrical :

1.Rated Voltage :600V
2.Rated Current : 60A
3.Torque Value : M6，22.15Lb.in
4.Wire Range:20-4AWG
5.Stripping Length : 12-15mm
6.Withstanding Voltage : AC2200V/1Min.
7.Operating Temperature : -40°C~+125°C
8.RoHS Compliance
9.Safty Approval : c UL us
10."★" is the key quality control point

GTR60 – XXP – 1 3 – 00
① ② ③ ④ ⑤

① Sereies NO.

② Poles
02 02Contacts
03 03Contacts
...
24 24Contacts

③ 1 Single Pitch
2 Double Pitch

④ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White

⑤ Customer Request: 00--Standard

1	Housing-1	XXXXXX	P	PC	UL94V-0
2	Housing-2	XXXXXX	2	PC	UL94V-0
3	Partition	XXXXXX	1	PC	UL94V-0
4	Screw M6	XXXXXX	2P	Steel	Zn Plated
5	Current carrier	XXXXXX	P	Copper alloy	Zn Plated
6	Nut	XXXXXX	2P	Steel	Zn Plated
7	Screw-Long	XXXXXX	2	Steel	Zn Plated
8	Hexagon Nut	XXXXXX	2	Steel	Zn Plated

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	MYZ DATE	21.06.25	SIZE	A4 UNITS mm	SHEET/OF 1 / 1
CHK.	DATE		SCALE	1:1	
APP.	DATE		NAME	GTR60-XXP-13-00	
Golten 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.			DWGNO.	XXXX	

Total Pitch Tolerances in mm									Nominal dimension range in mm									⊥		⫩	—	//	
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 250	over 250 to 350	over 350 to 500	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10	all	over 0 to 100	over 100 to 150	over 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5