

REV	CONTENT	CHK	DATE
V0.0	CONTENT	LJL	26.11.09

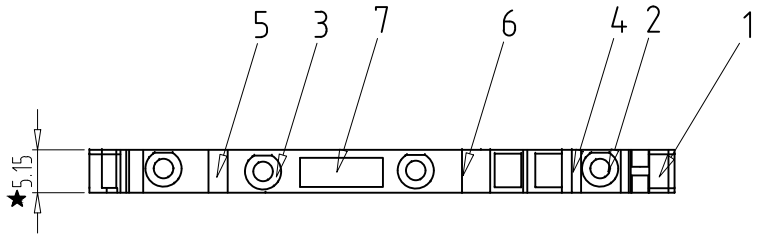

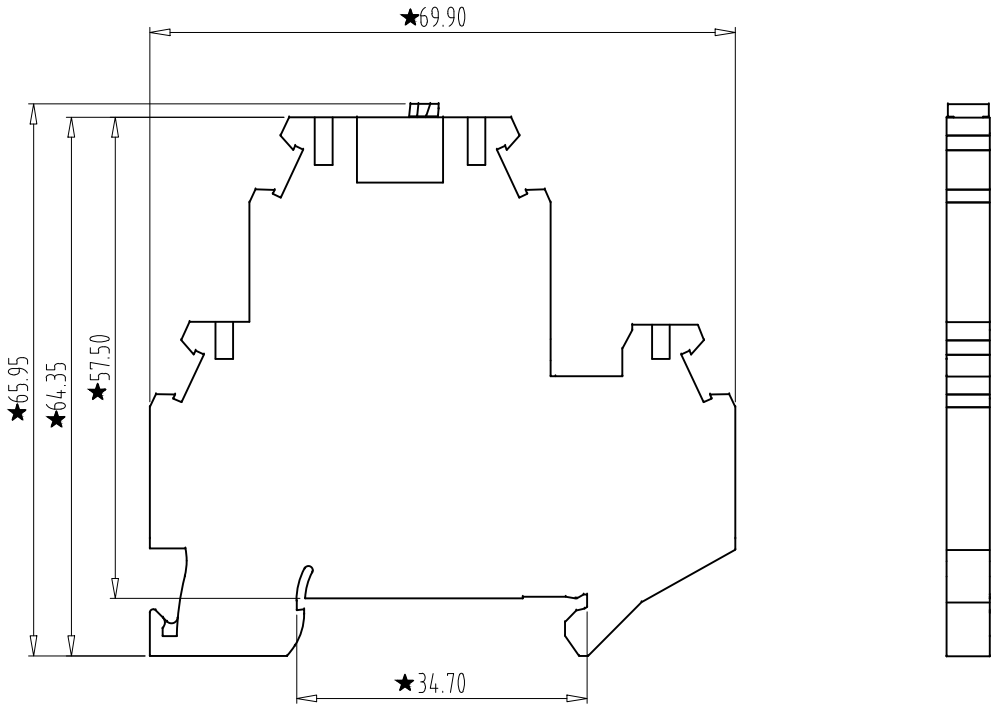

Electrical :

	IEC	UL
1.Rated Voltage :	400V	300V
2.Rated Current :	22A	20A
3.Wire Range:	0.14-2.5mm²	26-12AWG

4.Stripping Length : 9mm

5.Torque Value : M3 0.5N.M

6.Operating Temperature : -40°C~ +105°C

7.RoHS Compliance

8."★" is the key quality control point

GSDD 2.5 - 4- MT -X

① Sereies NO.

② Wire diameter
0.14-2.5mm²
26-12AWG

③ Connection quantity

④ Knife switch

⑤ Color:
GY-Grey
BU-Blue
BK-Black
GN-Green
OG-Orange
RD-Red
YE-Yellow
WH-White
BE-Beige

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
7	Knife switch	XX	1	Copper alloy	Sn Plated
6	CONDUCTOR 3	XX	1	Copper alloy	Sn Plated
5	CONDUCTOR 2	XX	1	Copper alloy	Sn Plated
4	CONDUCTOR 1	XX	1	Copper alloy	Sn Plated
3	Cage	XX	4	Steel	Zn Plated
2	Screw	XX	4	Steel	Zn Plated
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE

DWG.	LJL	DATE	26.11.09	SIZE	A4	UNITS	mm	SHEET/OF	1 / 1
CHK.		DATE		SCALE	1:1				
APP.		DATE		NAME	GSDD2.5-4-MT-X				

Golten 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD. DWGNO. XXXX

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥		⏥	—		//
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 250	over 250 to 350	over 350 to 500	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10	all	over 0 to 100	over 100 to 150	over 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5