
REV	CONTENT	CHK	DATE
V0.0	CONTENT	LJL	26.11.13

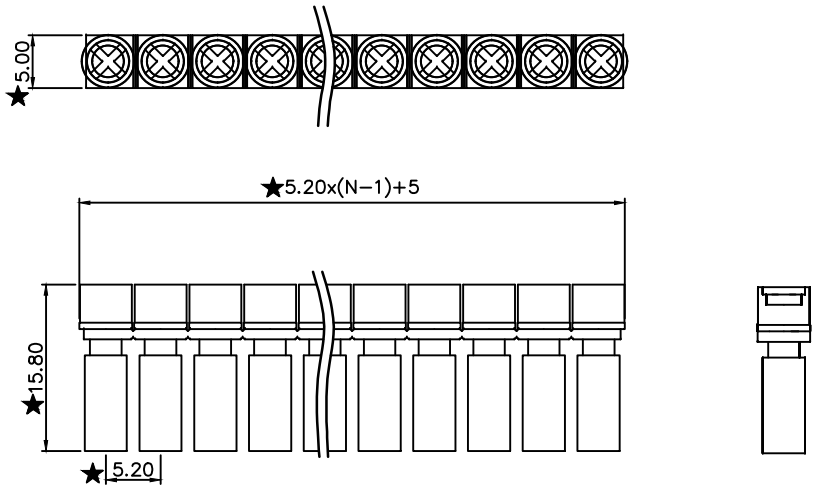

General information:
1.Dimension shall be interpreted per ASME Y14.5-2009
2.Operating temperature:-40°C~+105°C
3.Rated torque: M3,0.5-0.6N.m
4.RoHS Compliance
5."★" is the key quality point
6.Undimensioned Tolerances:

Pitch Range In mm			Nominal Dimension Range In mm					⊥ ⌒ ▱
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10
								∠
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

HOW TO ORDER:
GSB5 - X
Sereies No.
Ploes: 2~10

1	Housing	XXX	1	Steel	XX
ITEM	PAT.NAME.	PAT.NO.	QTY.	MATERIAL	NOTE
DWG.	LJL DATE	2026.11.13	SCALE	1:1 UNITS mm	SHEET 1/1
CHK.	DATE		REV	T0-1	TYPE:CUSTOMER DRAWING
APP.	DATE		NAME	GSB5-X	
Golten 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.			DWG NO.	XXXX	