



REV	CONTENT	CHK	DATE

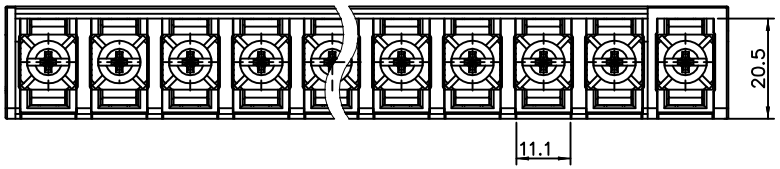

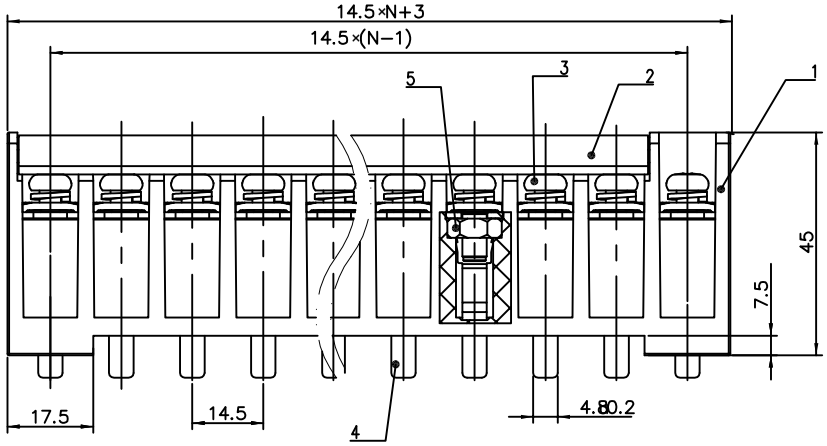





Electrical :

	UL	IEC
1.Rated Voltage :	600V	800V
2.Rated Current :	57A	57A
3.Wire Range:	22-8AWG	0.5-10.0mm²

4.Stripping Length : 13.0mm

5.Withstanding Voltage : AC2500V/1Min.

6Operating Temperature : -40°C~ +105°C

7.RoHS Compliance

8." ★ " is the key quality control point

GT0145H - B - XXP - X X - 20

① ② ③ ④ ⑤ ⑥

① Sereies NO.


② Without fixing hole

③ Poles
02 02Contacts
03 03Contacts
...
24 24Contacts

④ 1 Single Pitch
2 Double Pitch

⑤ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White

⑥ Customer Request: 10--Standard

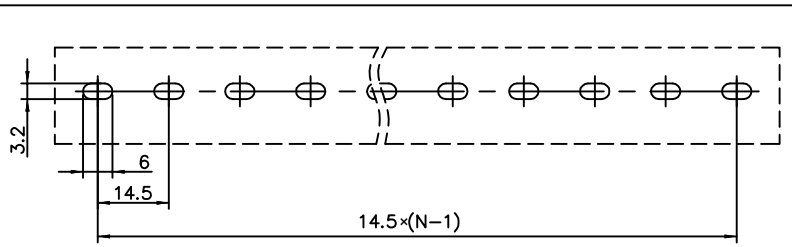

PCB LAYOUT

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥		⏥	—	//	
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 250	over 250 to 350	over 350 to 500	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10	all	over 0 to 100	over 100 to 150	over 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5

5	NUT	XX	P	STEEL	Zn Plated	
4	COVER	XX	1	PC	/	
3	PIN HEADER	XX	P	COPPER ALLOY	Tin Plated	
2	SCREW	XX	P	STEEL	Ni Plated	
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE	
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE	
DWG.	LZW DATE	24.09.05	SIZE	A4 UNITS mm	SHEET/OF 1/1	
CHK.	DATE		SCALE	1:1		
APP.	DATE		NAME	GT0145H-B-XXP-XX-20		
Golten 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.			DWGNO.	XXXX		